

REV-6POL/F300-18,5kW R/Y


FIRE-RATED SWITCH



Code	162536
	40A, IP65, 2NO, switch 0/1, red/ yellow


Product description	<p>Switch disconnecter 6 poles 40A + 2 early break auxiliary contacts. Fire rated class F300 according to EN 12101-3. Aluminium enclosure 2AL in grey color RAL7032 with rough surface finish treatment to resist corrosion, sizes 130x130x90. Protection degree IP65. Incoming on top and outgoing on bottom M25 threaded holes. Four fixing points. Red/yellow padlockable handle (up to 4 padlocks of 8mm diameter). Operation 90°, padlockable in all position Connection with cage terminals for cable 6-16 mm².</p>
----------------------------	--

Technical data

Thermal rating (I_{th})	40 A
Wire section (AWG)	6
Wire section rigid	6 - 25 mm ²
Wire section flexible	6 - 16 mm ²
Tightening torque	2 Nm
Connection screws	M5
Terminal	
Max. fuse protection (gG/aM)	40/32 A (415 V) 40/32 A (500 V)
Conditional shortcircuit current (I_{cc})	6 kA (415 V) 6 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Operational rating (I_e)	40 A
Dummy AC-21A	15 kW (3x230 V) 22 kW (3x415 V) 30 kW (3x500 V)

Mixed load AC-22A	11 kW (3x230 V)
	22 kW (3x415 V)
	22 kW (3x500 V)
Motor load AC-23A	11 kW (3x230 V)
	18,5 kW (3x415 V)
	22 kW (3x500 V)
Standards	IEC 60947-3
	EN 12101-3

Dimensions

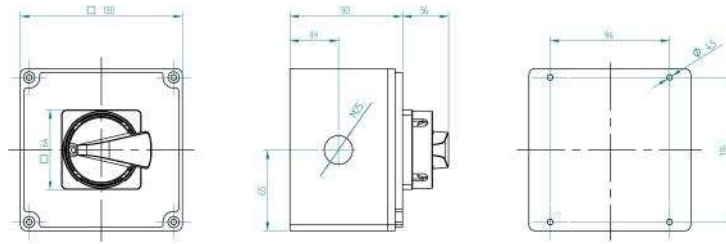

Connection

