

REV-6POL/F400-22kW R/Y

FIRE-RATED SWITCH




Code	162541
	63A, IP65, 2NO, switch 0/1, red/ yellow
Product description	Switch disconnecter 6 poles 63A + 2 early break auxiliary contacts. Fire rated class F400 according to EN 12101-3. Enclosure 2AC in grey color RAL7035 with surface finish treatment to resist corrosion, size 200x200x135. Protection degree IP65. 2 top incomings and 2 bottom outgoing M40. Four fixing points. Red/Yellow padlockable handle (up to 4 padlocks with 8mm diameter). Operation 90°, padlockable in all positions. Connection with cage terminals for cable 16-35 mm ² .

Technical data

Thermal rating (I_{th})	70 A
Wire section flexible	16 - 50 mm ²
Tightening torque	3,5 Nm
Connection screws	M8
Max. fuse protection (gG/aM)	63/63 A (415 V) 63/63 A (500 V)
Conditional shortcircuit current (I_{cc})	8 kA (415 V) 8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Operational rating (I_e)	63 A
Dummy AC-21A	22 kW (3x230 V) 45 kW (3x415 V) 45 kW (3x500 V)
Mixed load AC-22A	18,5 kW (3x230 V) 37 kW (3x415 V) 45 kW (3x500 V)
Motor load AC-23A	15 kW (3x230 V) 22 kW (3x415 V) 30 kW (3x500 V)
Standards	IEC 60947-3 EN 12101-3

Dimensions

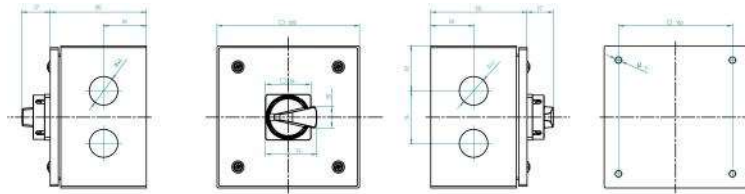

Connection

