


5BDU Series

Belt Drive Upblast Roof Ventilator

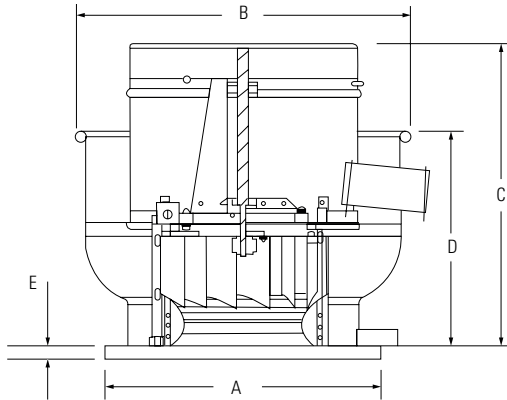

STANDARD FEATURES

- All ventilators are listed UL 705 for electrical and UL 762 for restaurant exhaust in USA only
- Models 5DBU10 - 5BDU24 are suitable for wall mount application
- Inlet temperatures up to 300°F
- Fully welded windband
- Externally cooled motor compartment



Fantech Inc. certifies that the 5BDU Series shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

Model	A	B	C	D	E
5BDU 10	19	23 ⁷ / ₈	23 ³ / ₈	16 ⁷ / ₈	1 ¹ / ₂
5BDU 12	22	26 ¹ / ₂	24 ¹ / ₄	17 ³ / ₄	1 ¹ / ₂
5BDU 13	22	27 ⁷ / ₈	24 ⁵ / ₈	18 ¹ / ₂	1 ¹ / ₂
5BDU 15	26	29 ⁷ / ₈	27 ³ / ₈	19 ³ / ₈	1 ¹ / ₂
5BDU 16	26	31 ³ / ₄	27 ³ / ₄	20 ¹ / ₈	1 ¹ / ₂

Model	A	B	C	D	E
5BDU 18	30	34	29 ⁷ / ₈	21 ¹ / ₈	1 ¹ / ₂
5BDU 20	30	36 ¹ / ₂	30 ¹ / ₄	22	1 ¹ / ₂
5BDU 24	34	42 ³ / ₈	33	24 ¹ / ₂	1 ¹ / ₂
5BDU 30	42	49 ¹ / ₂	38 ³ / ₄	27 ¹ / ₂	1 ¹ / ₂
5BDU 36	46	58 ¹ / ₆	42 ⁷ / ₈	31 ¹ / ₂	1 ¹ / ₂

All dimensions in inches.

Fan Specifications							Motor Specifications				
Line	Qty	Model No.	Tag	CFM	SP	Fan RPM	Watts	Volts	Phase	Hertz	Encl
1											
2											
3											
4											

Accessory Items	1	2	3	4	Accessory Items	1	2	3	4
☐					☐				
☐					☐				
☐					☐				
☐					☐				

Project: _____ Submitted: _____
 Customer: _____ Approved: _____
 Location: _____

United States 10048 Industrial Blvd. • Lenexa, KS 66061 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanafllakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
 For updated documentation please refer to www.fantech.net

