


BIA


Syrjäyttävä tuloilmalaite, säädettävä

Käyttöohje




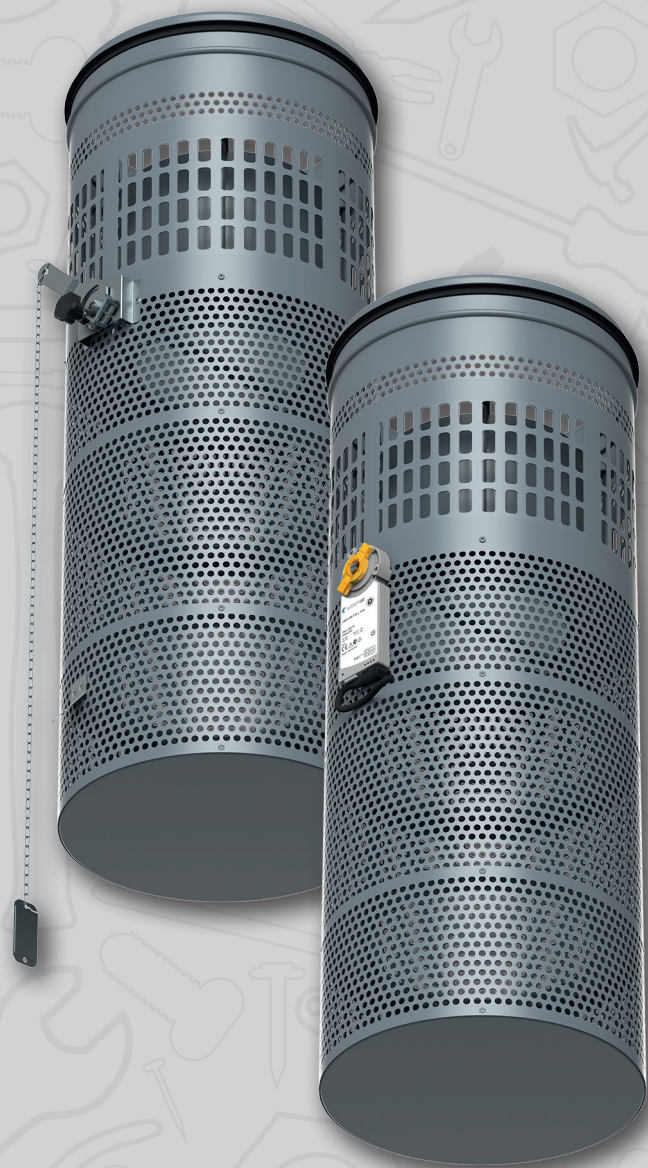

1.




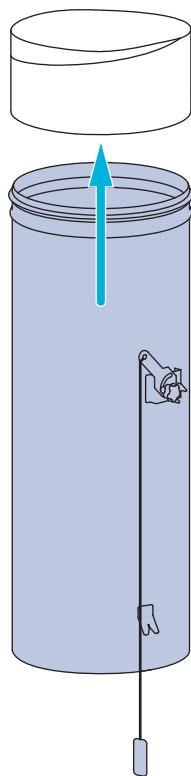


2.

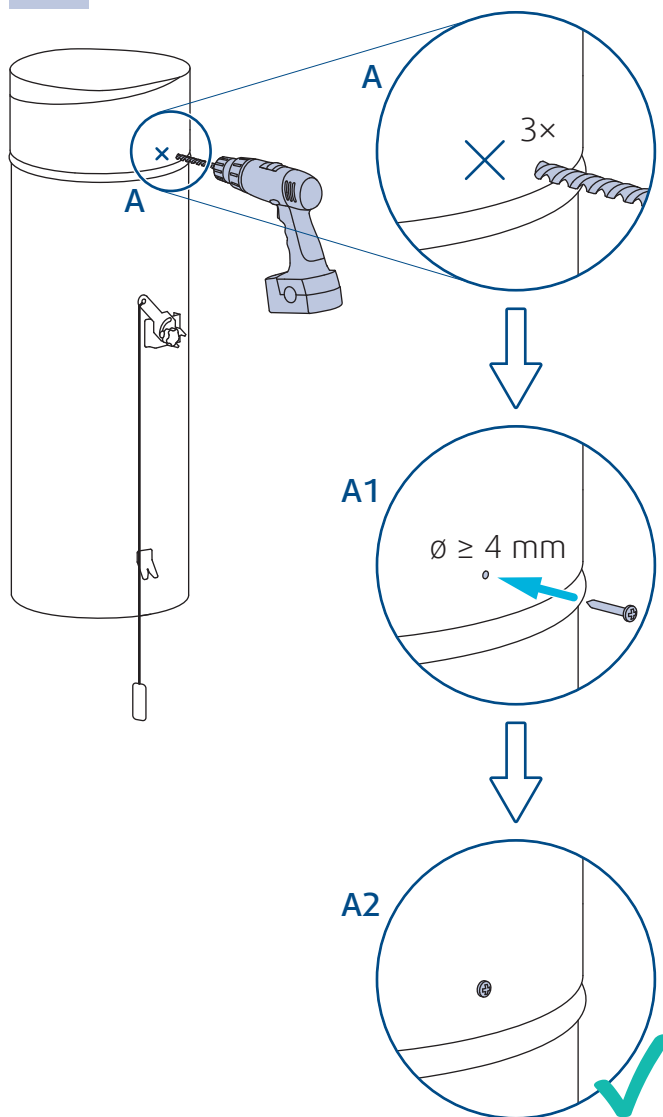



BIA HC

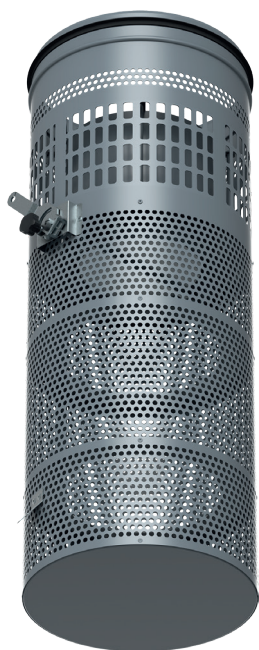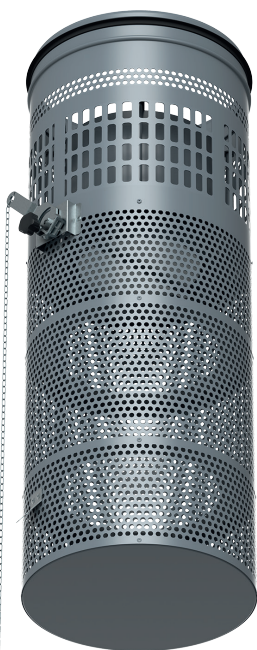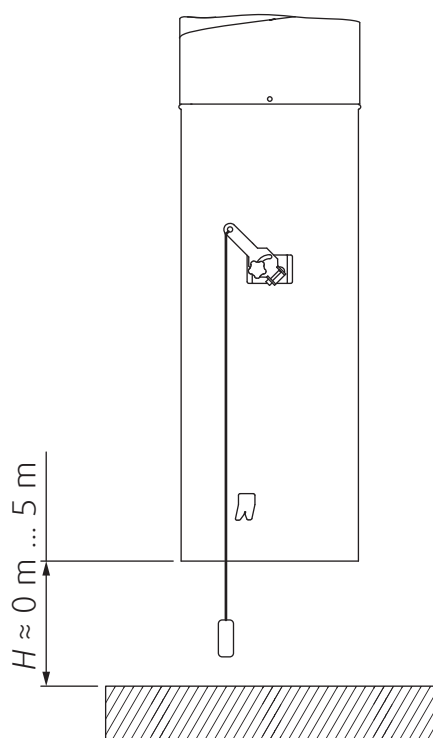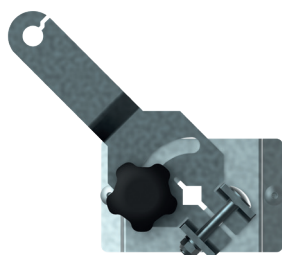a) $H \leq 2 \text{ m}$ b) $H > 2 \text{ m}$ 


BIA MC

c) $DN 200 \dots 315$ d) $DN 400 \dots 630$ 

"CM24-SR"



"LM24-SR" (DN 400)
 "NM24-SR" (DN 500, 630)


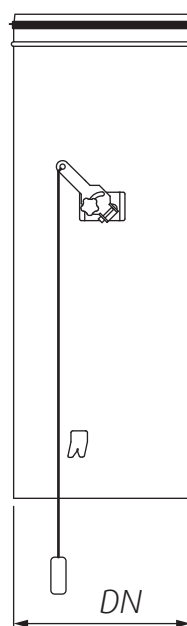


DN
200
250
315
400
500
630



a)

BIA HC
 $H \leq 2 \text{ m}$ 


1.

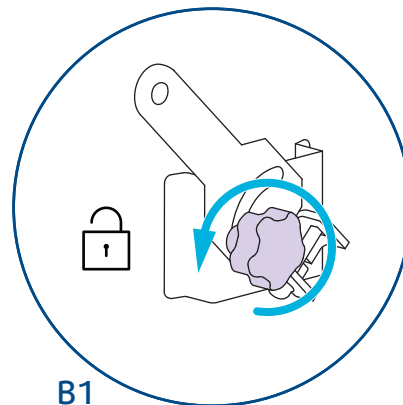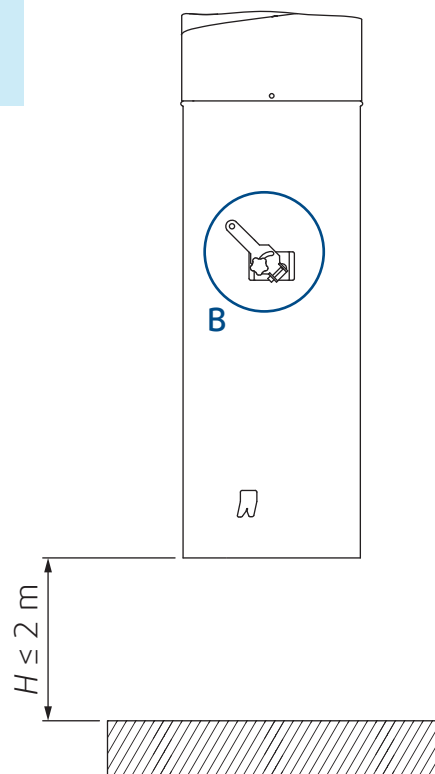

2.

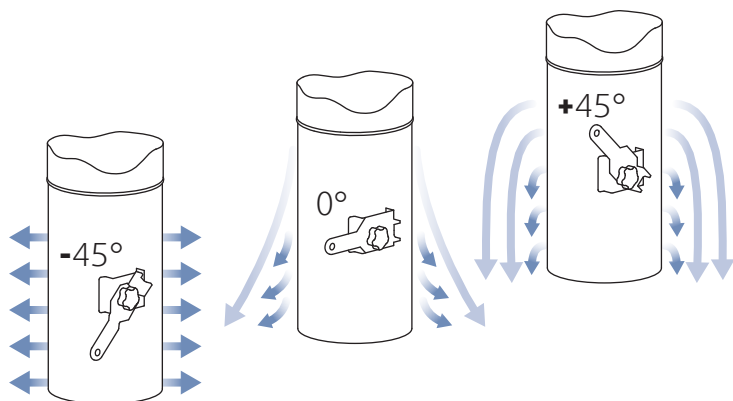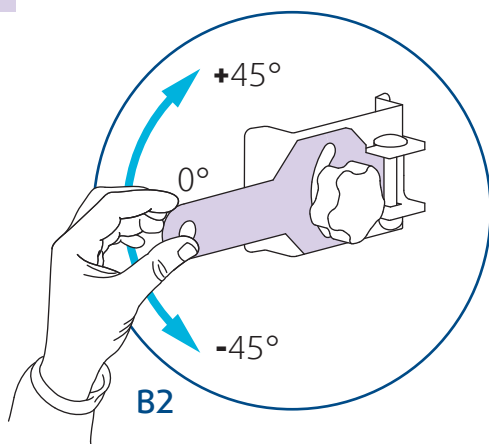


3.

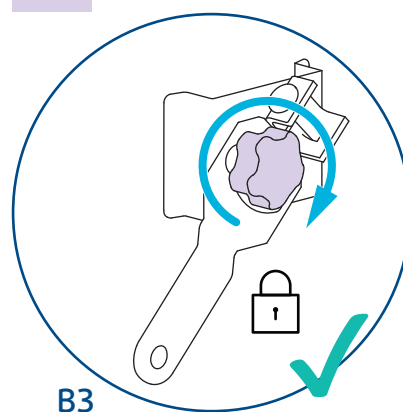





1.

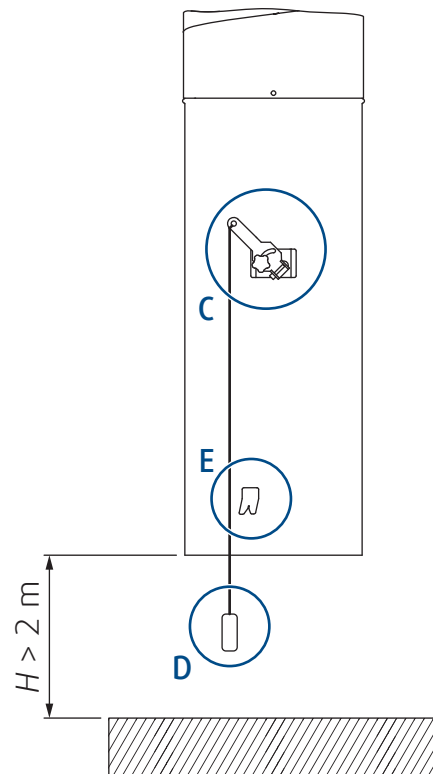


b)



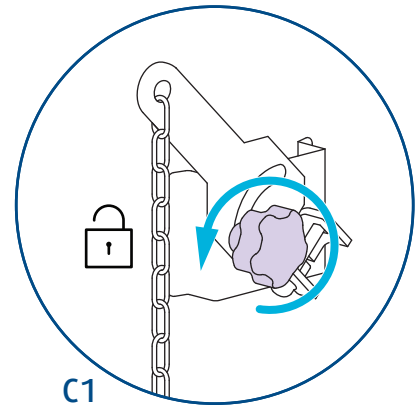
BIA HC
 $H > 2 \text{ m}$ 


2

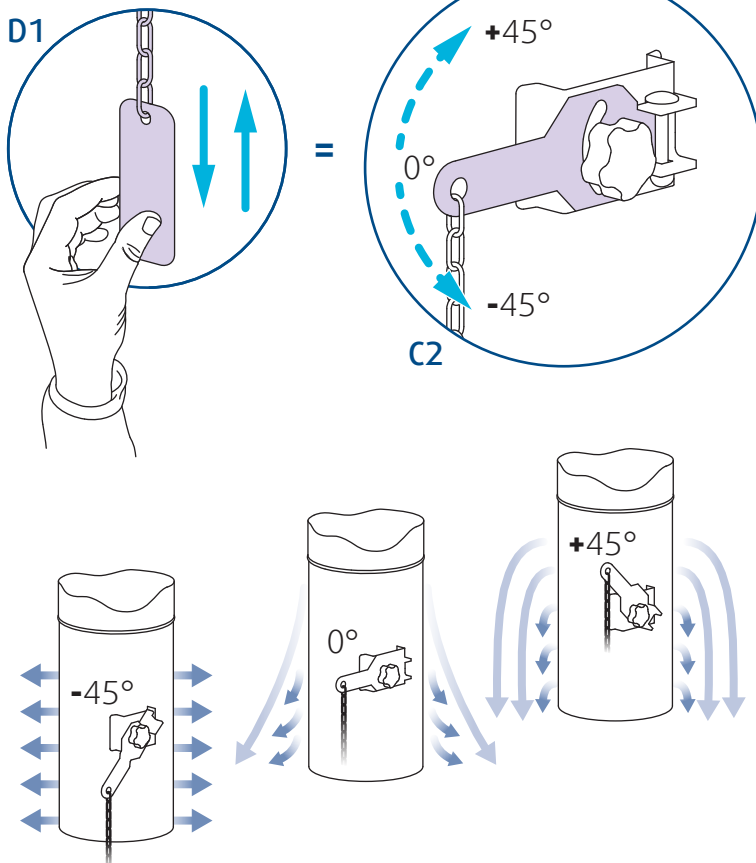

3.

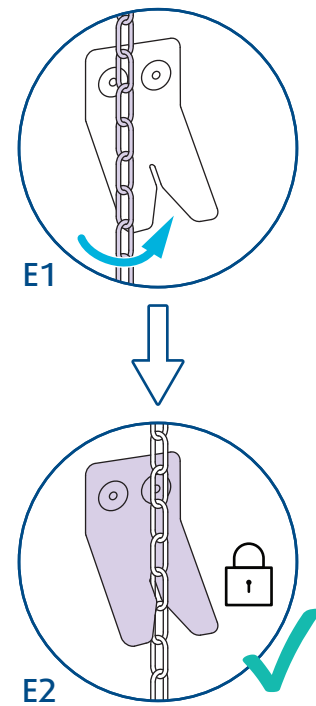

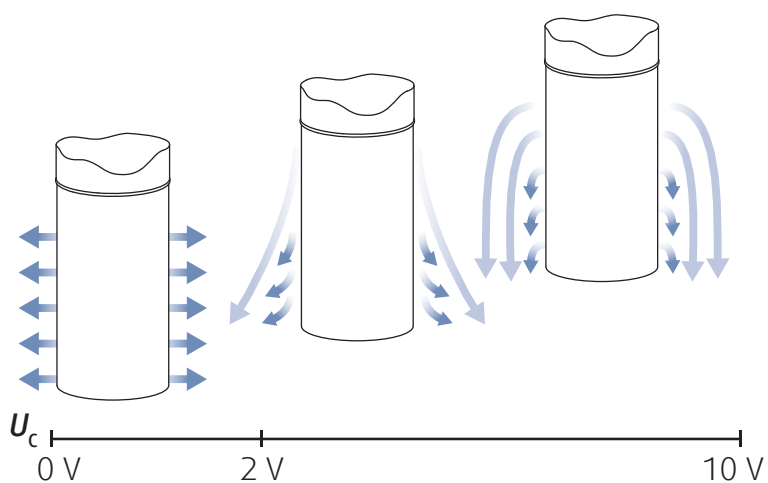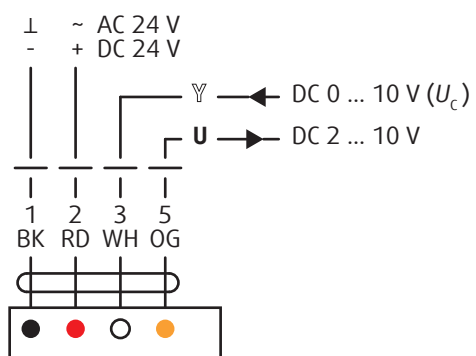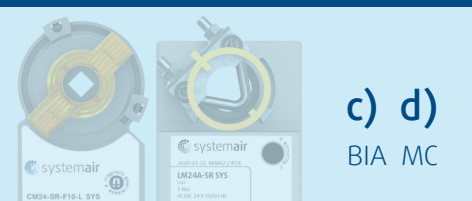

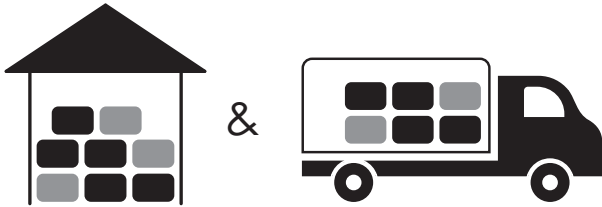

°C -40°C ... +50°C

% ≤ 95%



°C -20°C ... +50°C

% ≤ 95%



design.systemair.com

