



## Discreet and energy-efficient air curtain for revolving doors

Ruwen is a customized air curtain installed above your revolving door, with the exhaust duct adapted to the diameter of the door. Ruwen is equipped with energy-efficient EC motors which enable stepless control of the airflow. The air curtain is custom made to your specifications which gives a neat and discrete solution.

### Energy efficient and sustainable

The air curtain is equipped with EC motors that are up to 50% more energy efficient than traditional AC motors, and have a lower weight which makes for easier installations and greener transports.

### Intelligent control options

Ruwen is supplemented with an intelligent control system that allows you to optimize your comfort with minimum effort. Smart and automatic features enable simple set-up and operation for different Frico products groups.




### High performance

Frico air curtains are developed and manufactured in Sweden. The air curtains are tested in one of the most modern and advanced air and sound laboratories in Europe which means that we can guarantee a high performance product.

#### Ruwen



#### Available in 3 versions:

-  Ambient (without heat)
-  Electrical heating
-  Water heating

A revolving door prevents continuous drafts but, still lets in a certain amount of cold air at every rotation. With correctly installed air curtains great energy savings can be obtained.

#### Product key

Type - R - W - X - Z - Material / colour  
Example: RDFEC20WL - 2500 - 2900 - 2350 - 500 - P

See Dimension drawing for all measurements.

#### Type

- R** Radius of the revolving door.
- W** The opening width of the revolving door
- X** Depth of the revolving door outside the wall.
- Z** Relevant height.

#### Material/ Colour

- P = Polished stainless steel
- B = Brushed stainless steel
- MP = Mirror polished stainless steel
- State RAL code = Powder coating RAL
- State NCS code = Powder coating NCS

🌬️ Ambient, no heat - RDFEC A (IP20)

Voltage motor: 230V~

Type	Output [kW]	Airflow* <sup>1</sup> [m <sup>3</sup> /h]	Sound power* <sup>2</sup> [dB(A)]	Sound pressure* <sup>3</sup> [dB(A)]	Amperage motor [A]	Weight* <sup>7</sup> [kg]
RDFEC10A	0	1200/2400	78	46/62	3,2	60
RDFEC15A	0	1800/3500	79	47/64	4,1	130
RDFEC20A	0	2300/4700	81	48/65	6,0	180
RDFEC25A	0	3100/6150	83	50/67	6,9	200

⚡ Electrical heat - RDFEC E (IP20)

Type	Output steps [kW]	Airflow* <sup>1</sup> [m <sup>3</sup> /h]	$\Delta t$ * <sup>4</sup> [°C]	Sound power* <sup>2</sup> [dB(A)]	Sound pressure* <sup>3</sup> [dB(A)]	Amperage motor [A]	Voltage [V] Amperage [A] (heat)	Weight* <sup>7</sup> [kg]
RDFEC10E12	3,9/7,8/12	1200/2400	30/15	78	46/62	3,2	400V3~/17	80
RDFEC15E18	6/12/18	1800/3500	30/15	80	47/64	4,1	400V3~/26	130
RDFEC20E24	7,8/16/24	2300/4700	30/15	81	48/65	6,0	400V3~/34	180
RDFEC25E30	9,9/20/30	3100/6150	29/14	83	50/67	6,9	400V3~/43	200

💧 Water heat - RDFEC WL, coil for low water temperature ( $\leq 80$  °C) (IP20)

Type	Output* <sup>5</sup> [kW]	Output* <sup>6</sup> [kW]	Airflow* <sup>1</sup> [m <sup>3</sup> /h]	$\Delta t$ * <sup>4,5</sup> [°C]	$\Delta t$ * <sup>4,6</sup> [°C]	Water volume [l]	Sound power* <sup>2</sup> [dB(A)]	Sound pressure* <sup>3</sup> [dB(A)]	Amperage motor [A]	Weight* <sup>7</sup> [kg]
RDFEC10WL	10	18	1100/2300	18/13	30/23	2,2	78	45/62	3,2	80
RDFEC15WL	16	28	1700/3400	18/14	31/24	3,4	80	46/64	4,1	130
RDFEC20WL	23	39	2200/4600	19/15	32/25	4,5	81	47/65	6,0	180
RDFEC25WL	30	50	2800/5750	20/15	33/26	5,7	83	49/67	6,9	200

\*<sup>1</sup>) Low/high airflow (2V/10V).

\*<sup>2</sup>) Sound power ( $L_{WA}$ ) measurements according to ISO 27327-2: 2014, Installation type E.

\*<sup>3</sup>) Sound pressure ( $L_{pA}$ ). Conditions: Distance to the unit 5 metres. Directional factor: 2. Equivalent absorption area: 200 m<sup>2</sup>. At low/high airflow (2V/10V).

\*<sup>4</sup>)  $\Delta t$  = temperature rise of passing air at maximum heat output and low/high airflow (2V/10V).

\*<sup>5</sup>) Applicable at water temperature 60/40 °C, air temperature, in +18 °C.

\*<sup>6</sup>) Applicable at water temperature 80/60 °C, air temperature, in +18 °C.

\*<sup>7</sup>) Approximate weight for air curtain and duct.

\*<sup>5,6</sup>) See [www.frico.net](http://www.frico.net) for additional calculations.

Manufactured in Sweden with a corrosion proof housing made of hot zinc-plate and powder coated steel panels. Colour of air curtain and duct: white, RAL 9016, NCS S 0500-N. Colour of duct cover plate is customized.



**Type - R - W - X - Z - Material / colour**

Example: RDFEC20WL - 2500 - 2900 - 2350 - 500 - P

**Type** See Technical specifications.

**R** The outer radius of the revolving door above the entrance height.

**W** The opening width of the revolving door


**X** The largest distance between the outer radius R of the revolving door and the wall to the outside.

**Z** The height between the inner ceiling of the revolving door (the position of the outlet of the duct) up to the outer roof of the revolving door (where the air curtain is mounted).


**Material/ Colour** P = Polished stainless steel  
 B = Brushed stainless steel  
 MP = Mirror polished stainless steel  
 State RAL code = Powder coating RAL  
 State NCS code = Powder coating NCS  
 Only valid for duct cover plate. Air curtain and duct are made of powder coated steel panels, white, RAL9016.

Y is variable, depending on the other dimensions in the product key.

Top view

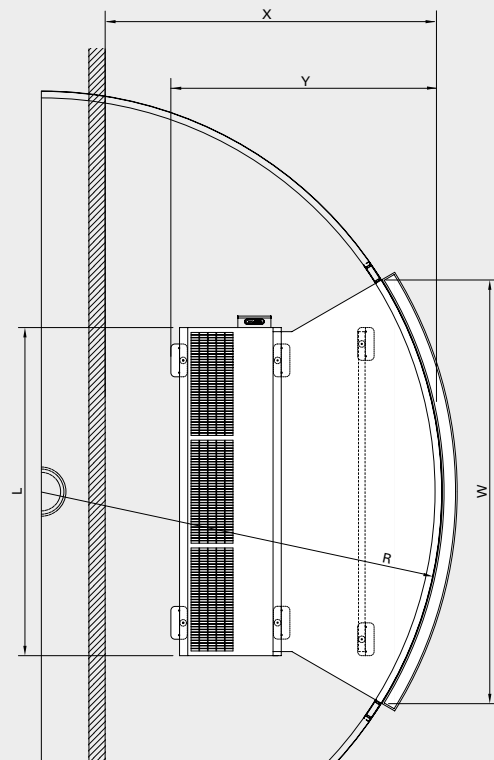

Side view

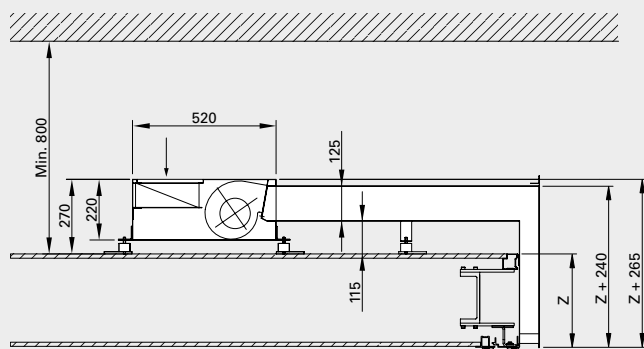

Minimum distance from outlet to floor for electrically heated units is 1800 mm.

Type	L [mm]
RDFEC10 E/A/WL	1000
RDFEC15 E/A/WL	1500
RDFEC20 E/A/WL	2000
RDFEC25 E/A/WL	2500



**Mounting**

The air curtain is installed horizontally on the top of the revolving door with vibration dampers on steel plates (100 x 200 mm) that distribute the weight. The unit could alternatively be mounted on beams (accessory).


**Connection**

Service and maintenance are easily made through the service hatch on the top side of the unit. The air curtain has an integrated PC board, mounted on the side of the air curtain, which is connected to the selected external control system FC.


Control is supplied by 230V~ to the PC board. The PC board is accessed via cable glands on the side of the unit. Communication- and sensor cables are connected to the PC board. **The electrical connection is made on the side of the unit.**

Water heated units are connected to the water system on the side of the unit. Flexible hoses are available as accessories. Water heated units must always be supplemented with a valve kit mounted outside the unit. See Valves and Accessories.

Top view

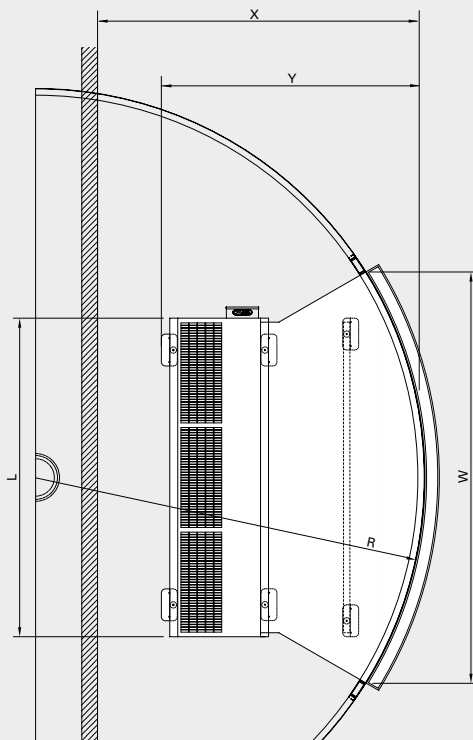

Side view

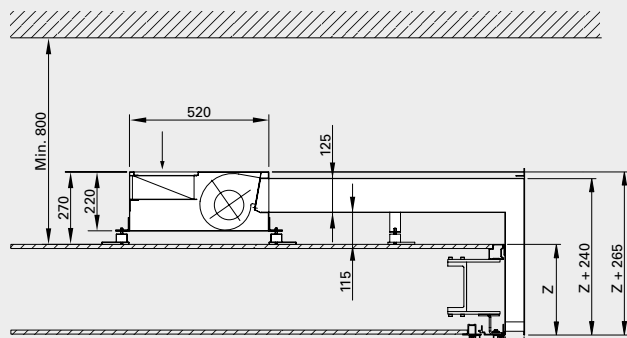

W: The opening width of the revolving door  
 R: The outer radius of the revolving door above the entrance height.

Minimum distance from outlet to floor for electrically heated units is 1800 mm.

Type	L [mm]
RDFEC10 E/A/WL	1000
RDFEC15 E/A/WL	1500
RDFEC20 E/A/WL	2000
RDFEC25 E/A/WL	2500

For wiring diagrams and other technical information, please see the manual and [www.frico.net](http://www.frico.net).

Frico air curtains come with an integrated PC-board and are supplemented with the intelligent control system FC of your choice, working together to create many smart and energy saving features. There are four different packages to choose from, depending on your requirements.

### FC Direct

#### Entry level

- Door contact
- Calendar function
- Filter timer

### FC Smart

#### FC Direct +

- Control via app (Bluetooth)
- Wireless sensors possible
- Adjustable calendar function
- Away and Boost function
- Adjustable filter timer
- Vestibule function
- Zone possibility
- Enhanced water control possible

### FC Pro

#### FC Direct + FC Smart +

- Automatic air flow control
- Automatic heat blocking

### FC Building - BMS

#### FC Direct +

- 0-10V, potential free contact or Modbus
  - Automatic air flow control\*
  - Automatic heat blocking\*
  - Heat and fan settings
  - Alarm indication
  - Read values
  - Enhanced water control possible
- \* Requires outdoor temp signal

### FC Direct



Entry level control system for a great start. The door contact provides an automatic energy-saving function, as the air curtain becomes active only when the door is open. When the door is closed, it remains on stand-by or runs on a lower fan speed if extra heat is needed. With the calendar function, you can choose periods of comfort and reduced mode.

### FC Smart



Second level control system for full freedom. FC Smart comes with all features from FC Direct plus additional energy saving features and the possibility of app control (Bluetooth). The app gives you access to all functions in the system, allowing you to set it up exactly the way you want it. It also enables you to create different zones with different settings in a larger system.

### FC Pro



Third level control system for maximum savings. FC Pro comes with all features from FC Direct and FC Smart plus additional automatic energy saving features. By receiving and reacting to information about indoor and outdoor temperatures, the right amount of heat and air flow is added to avoid overshoots and thus reducing energy consumption.

### FC Building - BMS system



Comprehensive control system for buildings, with the option to control via 0-10V, potential free contact (e.g. a relay) and/or Modbus RTU (RS485). FC Building enables you to receive product information status and alarms. Modbus allows for full use of all the energy saving features within the control system.

Item number	Type	Description
74684	FCDA	FC Direct, first level control system
74685	FCSA	FC Smart, second level control system
74686	FCPA	FC Pro, third level control system
74687	FCBA	FC Building, BMS system

FC Control system helps to create many smart and energy saving features. In addition to our four packages, components can be added to expand and customize the system. With the app levels (FC Smart and FC Pro) it is also possible to create and control different zones. Each added zone needs to be equipped with one FC Direct and can be designed to fit its specific needs by adding different accessories.



#### FC Direct, control kit

Control panel for fan and heat, door contact and 5 m communication cable. Used for additional zones with FC Smart and FC Pro. IP44.



#### FCRTX, external room temperature sensor

For reading of the room temperature on another location than that of the control panel, incl. 10 m sensor cable. IP20.



#### FCOTX, outdoor temperature sensor

Reading the outdoor temperature, incl. 10 m sensor cable. Enables automatic air curtain control and heat blocking. IP44.



#### FCLAP, local access point

Local access point for extra wireless sensors (when operating more than 8 sensors) and extended range for wireless sensors or app control (Bluetooth), incl. 10 m communication cable. IP44.



#### FCSC/FCBC, cable

FCSC Sensor cable available in 10 or 25 m for extra length. FCBC Communication cable for additional products within the same zone, available in 5, 10 or 25 m.



#### FCDC, door contact

The door contact regulates the airflow on/off. Allows you to control air curtains at different doorways individually within the same zone.



#### FCTXRF, indoor/outdoor wireless sensor

Indoor/outdoor wireless sensor with same features as FCRTX and FCOTX. The set up as outdoor or indoor sensor is made by a switch inside the sensor. Range up to 50 m. Battery life: 3-5 years. IP44.

#### FC Direct

##### Content

- FCCF control panel
- FCBC05
- FCDC

#### FC Smart

##### Content

- FCCF control panel
- FCBC10
- FCDC
- FCLAP

#### FC Pro

##### Content

- FCCF control panel
- FCBC10
- FCDC
- FCLAP
- FCTXRF

#### FC Building - BMS

##### Content

- FCCF control panel
- FCBC10
- FCDC
- FCBAP building access point

Item number	Type	Description	Dimensions
74684	FCDA	FC Direct, first level control system	89x89x26 mm (FCCF)
74694	FCRTX	External room temperature sensor	39x39x23 mm
74695	FCOTX	Outdoor temperature sensor	39x39x23 mm
74699	FCLAP	Local access point for extra wireless sensors and extended range	89x89x26 mm
74718	FCBC05	Extra communication cable, 5 m	5 m
74719	FCBC10	Extra communication cable, 10 m	10 m
74720	FCBC25	Extra communication cable, 25 m	25 m
74721	FCSC10	Extra sensor cable, 10 m	10 m
74722	FCSC25	Extra sensor cable, 25 m	25 m
17495	FCDC	Door contact	
74703	FCTXRF	Indoor/outdoor wireless sensor (for FC Smart, FC Pro)	89x89x26 mm



Water heated units must be supplemented with valves. The valve system controls the water flow and activates maximum heat only when needed. By activating the built-in bypass feature, a small leakage flow is let through to make sure there is always hot water in the heating coil, providing frost protection and faster heating. The return water temperature sensor is making sure that as much energy as possible from the water in the coil is used, thus reducing energy consumption.



#### VPFC, pressure independent and modulating valve system

Two way pressure independent control and adjustment valve with modulating actuator and shut-off valve.



#### FCWTA, return water temperature sensor

Enables control of return water temperature and automatic bypass function, which provides extended frost protection and reduced energy consumption.

Item number	Type	Dimension valves	Flow range l/s
238293	VPFC15LF	DN15	0,012-0,068
238294	VPFC15NF	DN15	0,024-0,13
238295	VPFC20	DN20	0,058-0,32
238296	VPFC25	DN25	0,10-0,60
238297	VPFC32	DN32	0,22-1,03
74702	FCWTA	Return water temperature sensor	

## Accessories - water heated units



#### FH1025, flexible hose

Flexible hose (DN25, 1" inside/outside thread) for easy connection to the pipe system.

Item number	Type	Used for	Consists of
330955	FH1025	RDFEC10/15/20/25W	2

## Accessories - mounting



#### RDSB, beam

If the revolving door roof cannot take the weight, Ruwen can be carried on a beam construction. Measurements 40x80 mm, state length when ordering.

Item number	Type	Used for	Consists of
	RDSB	RDFEC10/15/20/25	1