



BMS Gateways

The gateways enable fully bidirectional communication between Systemair Split and VRF systems and a building management system.



Single Split Gateways



Split & VRF Gateways

	Quantity Indoor units	 BACnet™	 Modbus	 KNX	Home Automation
Single Split Gateways	1 unit	INBACMID001100 Price: on request	INMBSACA001000 Price: on request	INKNXACA001000 Price: on request	—
Split & VRF Gateways	4 units			IN770MIDXXS0000 Price: on request	
	16 units			IN770MID00S0000 Price: on request	
	64 units			IN770MID00M0000 Price: on request	

For more information, please click on the respective article number.

If you have any questions, please get in touch with your contact person.

Sales office Frankfurt • Phone: +49 69 50702-0 • info@systemair.de



Technical Data


Model	IN770MID					
	INBACMID001I100	INMBSACA001I000	INKNXACA001I000	IN770MIDXXS0000	IN770MID00S0000	IN770MID00M0000
Number of indoor units	1	1	1	4	16	64
XYE-Connection	Split Indoor unit			Split Indoor unit/VRF outdoor unit		
BACnet**	✓	—	—	✓	✓	✓
Modbus**	—	✓	—	✓	✓	✓
KNX**	—	—	✓	✓	✓	✓
Home Automation	—	—	—	✓	✓	✓
Power Supply	12 VDC/AC, min. 200mA.	12 VDC/AC, min. 200mA.	—	12-36VDC (250mA) / 24 VAC (127 mA)*		
Dimension WxHxD (mm)	53x58x93	53x58x93	71x71x27	106x58x90		
Weight (g)	250	90	80	240		
Mounting	DIN rail	DIN rail		DIN rail (EN60715 TH35)		

* recommended power supply

** Only one communication line can be connected, either BACnet, Modbus or KNX

Example of connections

Split

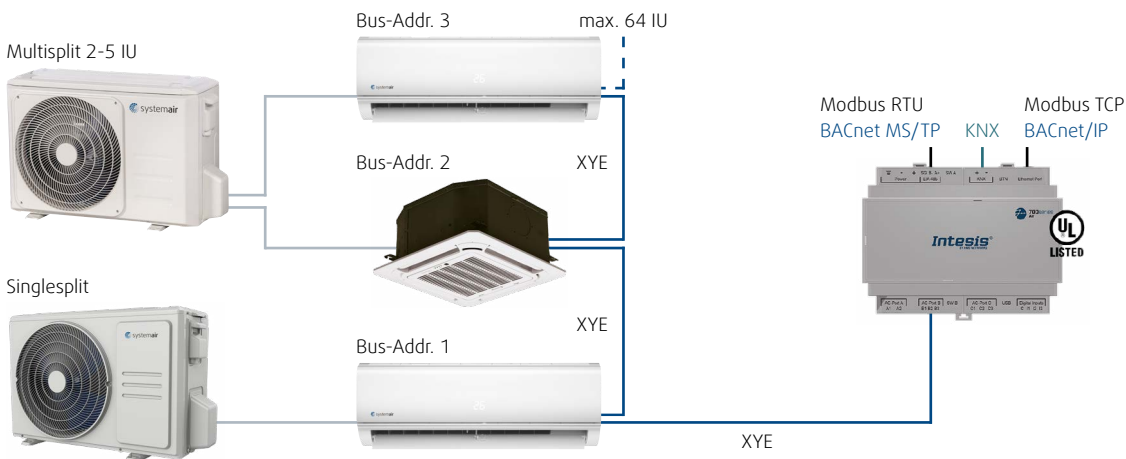

VRF-System

