


The sound attenuators are used to absorb the noise in air conditioning or ventilation ducts.

Construction:

- ✓ Casing in galvanised steel, thickness 0,8 mm up to \varnothing 1250 and 1,0 mm over;
- ✓ Mounting flange with threaded insert;
- ✓ Acoustic material in mineral wool 70 Kg /m³ with protection against erosion by glass fibre fire resistance M0 and extended metal sheet;
- ✓ Acoustic data tested in accordance to ISO 7235 (test report N° 9580180).

Execution:

- ✓ RSAP: with internal acoustic pod;
- ✓ Stainless steel execution on request;

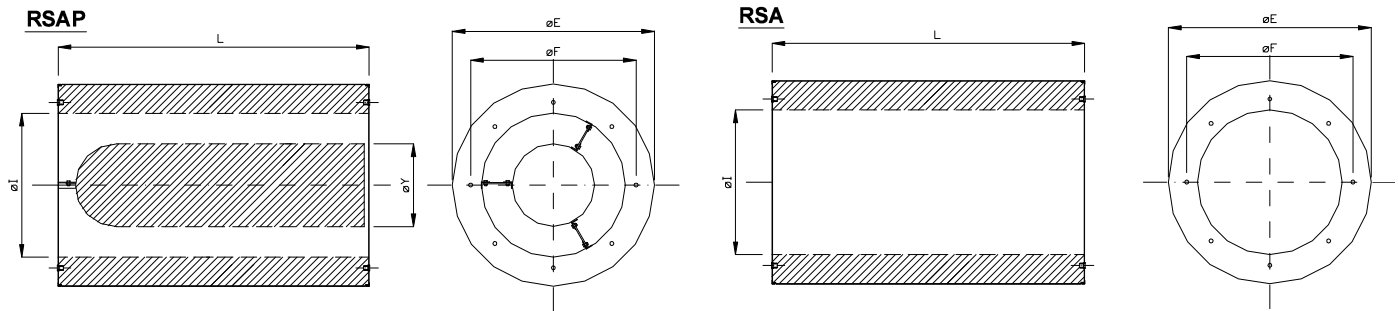

Ø Nominal	ø I [mm]	ø E [mm]	ø F [mm]	N° holes	ø holes	Ø insert	ø Y [mm]	L [mm]		
								ø I x 1	ø I x 1,5	ø I x 2
315	315	455	355	8	11	M8	140	315	472,5	630
355	355	495	395	8	11	M8	200	355	532,5	710
400	400	540	450	8	12	M10	200	400	600	800
450	450	610	500	8	12	M10	245	450	675	900
500	500	660	560	12	12	M10	245	500	750	1000
560	560	720	620	12	12	M10	295	560	840	1120
630	630	790	690	12	12	M10	295	630	945	1260
710	710	870	770	16	12	M10	380	710	1065	1420
800	800	1000	860	16	12	M10	380	800	1200	1600
900	900	1100	970	16	15	M12	380	900	1350	1800
1000	1000	1200	1070	16	15	M12	650	1000	1500	2000
1120	1120	1320	1190	20	15	M12	650	1120	1680	2240
1250	1250	1450	1320	20	15	M12	650	1250	1875	2500

